


Alcoa  
Fastening  
Systems

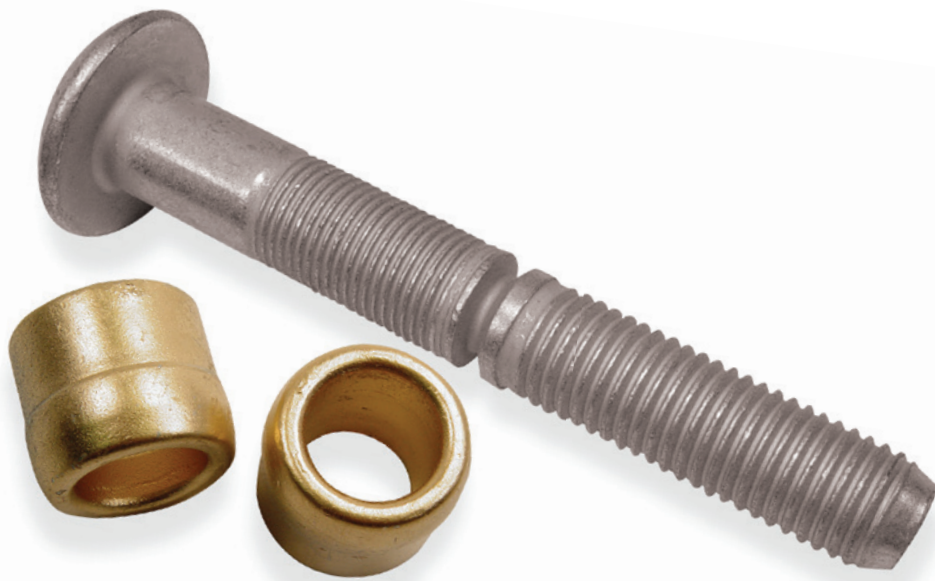

## C50L<sup>®</sup> HuckBolt<sup>®</sup>

Huck-engineered lockbolts  
for the most challenging  
applications


Vibration resistant  
Longer fatigue life  
Consistent installations

1/2" - 1-3/8"

**HUCK**<sup>®</sup>

## C50L<sup>®</sup> HuckBolt<sup>®</sup>


Grade 5 fasteners certified to meet or exceed all ASTM A-325 standards.

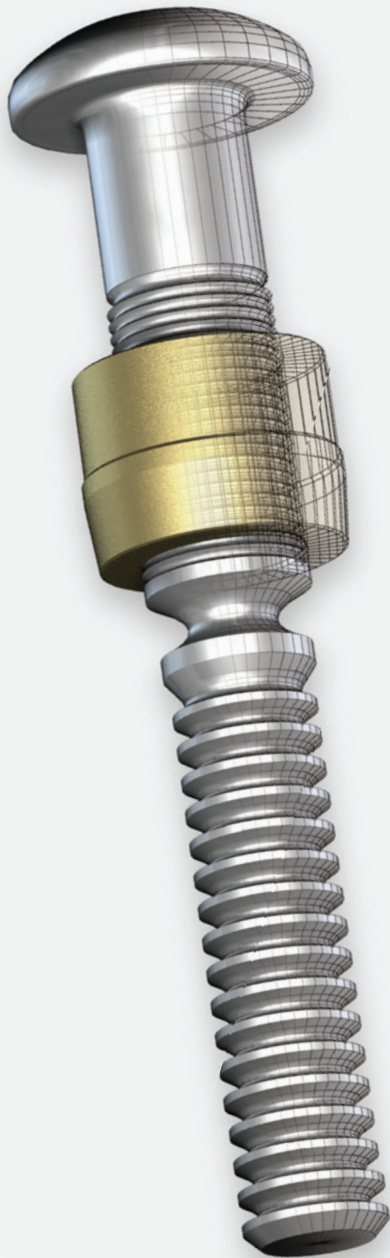

For applications ranging from railcar to mining equipment manufacturing, C50L<sup>®</sup> HuckBolt<sup>®</sup> fasteners from Alcoa Fastening Systems offer superior vibration resistance and overall durability. Heavy-duty applications demand tough, reliable fasteners. And extensive testing has demonstrated that C50L HuckBolt fasteners meet or exceed the performance of torqued bolts in both shear and tensile strength (with a longer fatigue life). Value is built in, too. Over the lifetime of your product, the investment you make in the quality of C50L HuckBolt fasteners will pay for itself. You won't find a stronger, more reliable fastening system, no matter what your application.

## Installs safer and quieter

The C50L HuckBolt system is engineered to be installed without torquing or multiple impacts. Noise level is significantly reduced, and as a result, your installation area becomes quieter, less stressful, and more productive.

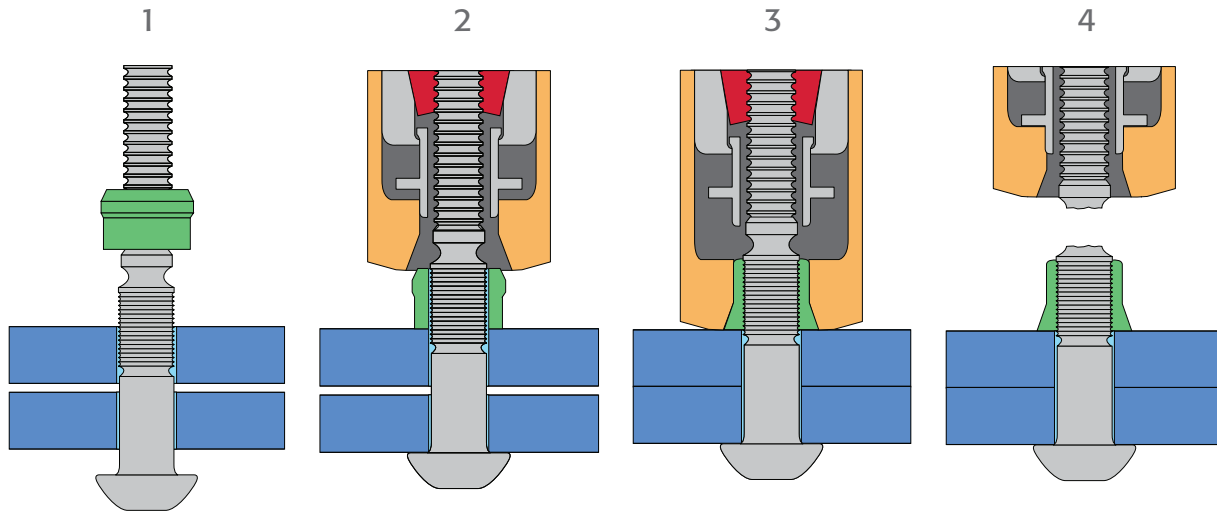

*The pin is inserted into the prepared hole and the smooth bore collar is placed on the pin*

*The installation tool is applied to the pintail. When the tool is activated, the jaws in the nose assembly pull on the pintail and the nose anvil pushes on the collar to remove any gap.*


*The nose anvil starts to swage the collar into the lockgrooves on the pin. Continued swaging causes the collar to lengthen and develop clamp.*

*When swaging of the collar into the lockgrooves is complete, the pintail separates from the pin which completes the installation cycle.*

## Successful, consistent installations


Unlike threaded fasteners, the C50L HuckBolt delivers consistent installation results. High costs of calibrating, maintaining, and replacing tools are eliminated. And installation does not require expensive, highly experienced workers.

- Swaged-on collar forms a permanent, vibration-proof connection
- Initial long length of fastener enables pull-out of large gaps
- Pre-load remains consistent from installation-to-installation

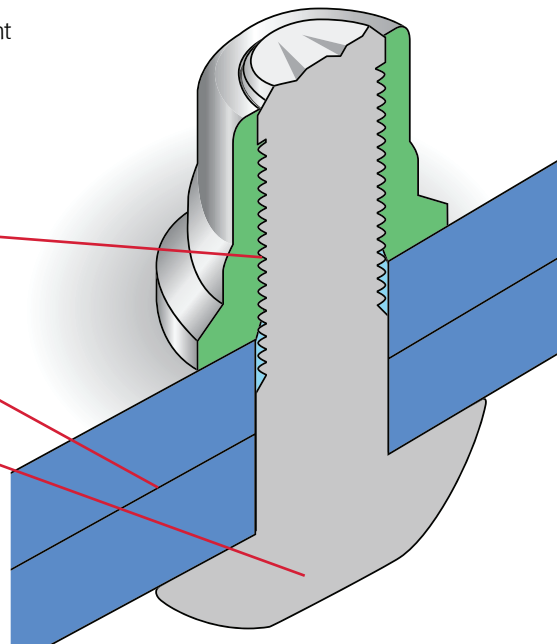

# C50L® HuckBolt® data and dimensions

## Head style options

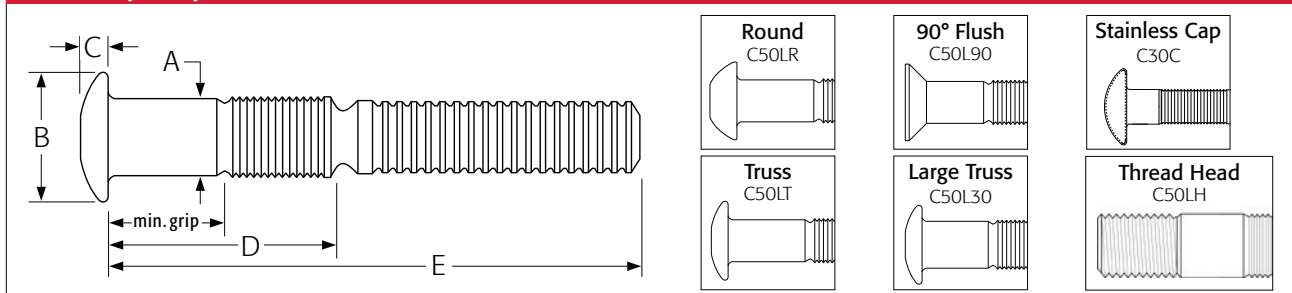

## Fastener dimensions

Diameter	Code	Round Head			Truss Head C50LT		C50L30		90° Flush Head		Stainless Steel Capped Head		Thread Head C50LH	
		A	B	C	B	C	B	C	B	C	B	C	B	C
1/2"	16	0.515 - 0.490	0.906	0.316	0.906	0.240	1.090	0.266	0.906	0.250	—	v	—	—
5/8"	20	0.642 - 0.617	1.141	0.397	1.141	0.297	1.330	0.315	1.140	0.313	1.440	0.390	—	—
3/4"	24	0.768 - 0.741	1.383	0.495	1.383	0.360	—	—	1.370	0.375	—	—	—	—
7/8"	28	0.895 - 0.866	1.610	0.550	1.610	0.420	—	—	1.594	0.430	—	—	—	—
1"	32	1.025 - 0.990	1.850	0.618	—	—	—	—	—	—	—	—	—	—
1-1/8"	36	1.095 - 1.125	2.063	0.688	—	—	—	—	—	—	—	—	—	—
1-3/8"	44	1.400 - 1.350	2.530	0.850	—	—	—	—	2.510	0.670	—	—	—	1.688

## Collar dimensions

Style	Diameter	F	G	H	J	K
Standard-LC LC	1/2"	0.515 - 0.535	0.800 - 0.765	0.645 - 0.610	—	—
	5/8"	0.650 - 0.665	0.985 - 0.970	0.875 - 0.845 <sup>3</sup>	—	—
	3/4"	0.775 - 0.790	1.180 - 1.165	0.960 - 0.930	—	—
	7/8"	0.915 - 0.920	1.375 - 1.360	1.113 - 1.083	—	—
	1"	1.035 - 1.050	1.570 - 1.550	1.275 - 1.240	—	—
Flanged-3LC <sup>1</sup> 3LC <sup>1</sup>	1-1/8"	1.165 - 1.185	1.770 - 1.750	1.440 - 1.390	—	—
	1/2"	0.510 - 0.530	0.807 - 0.793	0.760 - 0.722	0.130 - 0.120	1.035 - 0.980
	5/8"	0.648 - 0.660	0.996 - 0.980	0.962 - 0.926	0.170 - 0.142	1.273 - 1.227
	3/4"	0.775 - 0.793	1.195 - 1.175	1.150 - 1.115	0.200 - 0.175	1.520 - 1.480
	7/8"	0.895 - 0.907	1.370 - 1.360	1.333 - 1.300	0.230 - 0.205	1.615 - 1.575
Low Profile-8LC <sup>2</sup> / LC-2R 8LC <sup>2</sup>	1-1/8"	1.160 - 1.770	1.760 - 1.750	1.715 - 1.675	0.289 - 0.273	2.145 - 2.105
	1/2"	0.508 - 0.535	0.800 - 0.780	0.500 - 0.470	—	—
	5/8"	0.640 - 0.665	0.982 - 0.972	0.700 - 0.670	—	—
	3/4"	0.775 - 0.790	1.180 - 1.165	0.745 - 0.715	—	—
	7/8"	0.903 - 0.920	1.375 - 1.360	0.863 - 0.833	—	—
AC-R44	1.030 - 1.050	1.568 - 1.552	0.980 - 0.950	—	—	
AC-R44	1-3/8"	1.407 - 1.420	2.159 - 2.146	1.762 - 1.738	—	—

1 When using 3LC collars, include J dimension in grip dimension to determine grip number.

2 Optional collar at reduced clamping force and tensile strength. Contact AFS for data. When using 8LC collars, subtract J dimension from grip dimension to determine grip number.

3 H length for 20 (5/8") diameter in F, I or 2CU material is 805 - 770.

# C50L® HuckBolt® data and dimensions

## Grip tables

Grip	Grip Range	1/2" (16)		5/8" (20)		3/4" (24)		7/8" (28)		1" (32)		1-1/8" (36)		1-3/8" (44)
		D	E	D	E	D	E	D	E	D	E	D	E	Grip range
4	.250 - .500	1.213	3.172	1.433	3.656	1.518	4.156	—	—	—	—	—	—	up to
8	.500 - .750	1.463	3.422	1.683	3.906	1.768	4.406	1.921	4.688	2.073	5.375	—	—	34.25"
12	.750 - 1.000	1.713	3.672	1.933	4.156	2.018	4.656	2.171	4.938	2.323	5.625	—	—	
16	1.000 - 1.250	1.963	3.922	2.183	4.406	2.268	4.906	2.421	5.188	2.573	5.875	—	—	Call for data.
20	1.250 - 1.500	2.213	4.172	2.433	4.656	2.518	5.156	2.671	5.438	2.823	6.125	—	—	
24	1.500 - 1.750	2.463	4.422	2.683	4.906	2.768	5.406	2.921	5.688	3.073	6.375	—	—	
28	1.750 - 2.000	2.713	4.672	2.933	5.156	3.018	5.656	3.171	5.938	3.323	6.625	—	—	
32	2.000 - 2.250	2.963	4.922	3.183	5.406	3.268	5.906	3.421	6.188	3.573	6.875	—	—	
36	2.250 - 2.500	3.213	5.172	3.433	5.656	3.518	6.156	3.671	6.438	3.823	7.125	—	—	
40	2.500 - 2.750	3.463	5.422	3.683	5.906	3.768	6.406	3.921	6.688	4.073	7.375	—	—	
44	2.750 - 3.000	3.713	5.672	3.933	6.156	4.018	6.656	4.171	6.938	4.323	7.625	—	—	
48	3.000 - 3.250	3.963	5.922	4.183	6.406	4.268	6.906	4.421	7.188	4.573	7.875	—	—	
52	3.250 - 3.500	4.213	6.172	4.433	6.656	4.518	7.156	4.671	7.438	4.823	8.125	—	—	
56	3.500 - 3.750	4.463	6.422	4.683	6.906	4.768	7.406	4.921	7.688	5.073	8.375	5.250	8.563	
60	3.750 - 4.000	4.713	6.672	4.933	7.156	5.018	7.656	5.171	7.938	5.323	8.625	5.500	8.813	
64	4.000 - 4.250	4.963	6.922	5.183	7.406	5.268	7.906	5.421	8.188	5.573	8.875	5.750	9.063	
68	4.250 - 4.500	5.213	7.172	5.433	7.656	5.518	8.156	5.671	8.438	5.823	9.125	6.000	9.313	
72	4.500 - 4.750	5.463	7.422	5.683	7.906	5.768	8.406	5.921	8.688	6.073	9.375	6.250	9.563	
76	4.750 - 5.000	5.713	7.672	5.933	8.156	6.018	8.656	—	—	6.323	9.625	6.500	9.813	
80	5.000 - 5.250	5.963	7.922	—	—	—	—	—	—	6.573	9.875	6.750	10.063	
84	5.250 - 5.500	—	—	—	—	—	—	—	—	6.823	10.125	7.000	10.313	
88	5.500 - 5.750	—	—	—	—	—	—	—	—	7.073	10.375	7.250	10.563	
92	5.750 - 6.000	—	—	—	—	—	—	—	—	7.323	10.625	7.500	10.813	

## Installed fastener values


Diameter	Carbon Steel Pins LC-2R or 3LC-2R Collars			2024C Aluminum Pins LC-F or 3LC-F Collars			6061F Aluminum Pins LC-I or 3LC-I Collars				
	Shear	Clamp	Tensile	Shear	Clamp	Tensile	Shear	Clamp	Tensile		
1/2"	14400	12050	17050	7300	5900	7850	5300	4400	4900		
5/8"	22500	19200	27100	11400	9200	12300	8300	6900	7670		
3/4"	32400	28400	40100	16400	13300	17700	11900	9950	11040		
7/8"	43400	39250	55450	SPECIAL ORDER ONLY							
1"	56500	51500	72700	SPECIAL ORDER ONLY							
1-1/8"	69500	58450	82950	—	—	—	—	—	—		
1-3/8"	100000	85000	129500	—	—	—	—	—	—		

## Hole data

Diameter	Max Hole
1/2"	0.563
5/8"	0.688
3/4"	0.813
7/8"	0.938
1"	1.063
1-1/8"	1.188
1-3/8"	1.500

## Inspection data

Diameter	Pin Part No.	LC Collar	3LC Collar	A max	B max	C min	D max
1/2"	C50L(-)(-)16	LC-2R16G	3LC-2R16G	.063	.375	.406	.733
5/8"	C50L(-)(-)20	LC-2R20G	3LC-2R20G	.063	.375	.625	.916
3/4"	C50L(-)(-)24	LC-2R24G	3LC-2R24G	.063	.375	.656	1.110
7/8"	C50L(-)(-)28	LC-2R28G	3LC-2R28G	.063	.375	.750	1.282
1"	C50L(-)(-)32	LC-2R32G	3LC-2R32G	.063	.375	.875	1.465
1-1/8"	C50LR-BR36	LC-2R36G	—	.063	.625	.906	1.646
1-3/8"	C50LR-BR44	AC-R44U	—	.188	.688	1.250	2.020

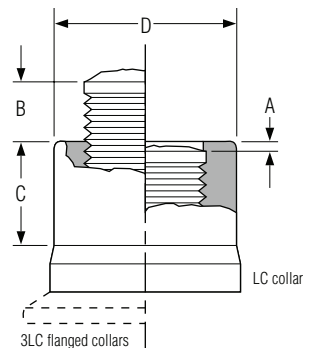

# C50L® HuckBolt® Installation Tooling

## Hydraulic Tools & Nose Assemblies

	Model 2620	Model 2620PT	Model 2624	Model 3585	Model 2630	Model 507	Model 12142
<b>Nose Assembly</b>							
1/2"	99-5000	99-5002	99-5021	99-5021			
5/8"			99-5008	99-5008			
3/4"				99-5010			
7/8"					99-5014		
1"						99-5016	
1-1/8"						99-5019	
1-3/8"							Integral



2620/2620-PT\*



2624



3585



2630



507



12142

## Tooling weight and dimensions

Model	Weight	Length	Height	Width
2620/2620-PT*	10.4/11.0 lbs.	6.60"/10.10"	7.0"	2.82"
2624	13.9 lbs.	7.37"	7.73"	3.48"
3585	18.5 lbs.	7.84"	10.36"	4.02"
2630	22.3 lbs.	7.90"	8.65"	4.44"
507	43.4 lbs.	15.50"	6.00"	5.40"
12142	60.0 lbs.	11.76"	6.56"	6.56"

For limited clearance installation tools contact manufacturer.  
\* Pass through



Powerig  
Model 918/  
918-5



Powerig  
Model 940

## Huck Powerig® hydraulic units

Model 918/918-5	Model 940	Model 913H not shown	Model 968 not shown
High-production applications	Portable; production and repair	Portable; production and repair	Portable; production and repair
918 powers 2 tools (2 gpm/tool) 918-5 powers 3 tools (1.3 gpm/tool)	70 in. <sup>3</sup> /min. flow rate (.3 gpm)	139 in. <sup>3</sup> /min. flow rate (.6 gpm)	70 in. <sup>3</sup> /min. flow rate (.3 gpm)
Electrically powered; 220, 440, or 550 volts, 3 phase	Electrically powered; 115 or 220 volts, single phase	Gasoline powered	Air powered; 50 cfm (.024 m <sup>3</sup> /s)
Weighs 585/601 lbs. without hydraulic fluid	Weighs 66 lbs. without hydraulic fluid	Weighs 122 lbs. without hydraulic fluid	Weighs 75 lbs. without hydraulic fluid
44 3/4" H x 25 3/4" W x 10 3/4" D	13.9" H x 6.1" W x 18.5" L	24" H x 21" W x 27" L	10.45" H x 16.33" W x 5.68" L

# Ordering Information

Follow the form below to construct a part number for ordering C50L pins and their respective collars. Refer to the Grip Tables (page 5) for grip numbers.

## Pins

C50L (HEAD STYLE) - (MATERIAL) (DIAMETER) - (GRIP NUMBER) - (COATING)

Example: C50LR-BR16-4 is a C50L HUCKBOLT fastener, Round Head, Carbon Steel, 1/2" Diameter, Grip 4

Bolt Head Style	Prefix
Round	R
Truss	T
Large Truss	30
90° Flush	90
Thread Head	H

Bolt Material	Code
Carbon Steel	BR
Aluminum 2024 and 6061 special order only	
Stainless Steel available on request	

Diameter	Code
1/2"	16
5/8"	20
3/4"	24
7/8"	28
1"	32
1-1/8"	36
1-3/8"	44

Grip
Refer to Grip Tables on page 5

Coating	Suffix
Bare	(blank)
Zinc	GA

\*Additional coating options available upon request

## Collars

(COLLAR STYLE) - (MATERIAL) (DIAMETER) (COATING) (OPTIONS)

Example: LC-2R16G is a Standard Collar, Low Carbon Steel, 1/2" Diameter, Zinc Finish

Collar Style	Prefix
Standard	LC-
Flanged	3LC-
Low Profile	8LC-
Low Profile (44)	AC-R44

Material	Code
Low Carbon Steel	2R
Aluminum special order only	


Diameter	Code
1/2"	16
5/8"	20
3/4"	24
7/8"	28
1"	32
1-1/8"	36
1-3/8"	44

Coating	Code
Zinc	G
Additional coating options available	

Options	Suffix
Tab-Lok	L

### Tab-Lok™

The Tab-Lok feature makes sure the collar stays on the pin, before installation, in overhead and down slanted pin placements. To order Tab-Lok collars refer to adjacent charts.



# Alcoa Fastening Systems



For more than 120 years, the name Alcoa has been recognized worldwide as a strong leader in product quality and customer support. These strengths are found in every product manufactured for Alcoa Fastening Systems, offering the greatest breadth and depth of fastening system solutions in the industry.

Alcoa Fastening Systems (AFS) maintains company offices in the United States and in many other countries. AFS fastener distributors are also located in many of the world's industrial centers, where they provide a ready source of AFS fasteners, installation tools, tool parts, and application assistance.

## Americas

Industrial Fastener Division  
8001 Imperial Drive  
Waco, TX 76712, USA  
P.O. Box 8117  
Waco, TX 76714-8117, USA  
Tel: 800 388 4825  
Fax: 800 798 4825

Installation Tool Division  
1 Corporate Drive  
Kingston, NY 12401, USA  
Tel: 800 278 4825  
Fax: 845 334 7333

AFS Industrial Distribution  
Group Headquarters  
1925 North MacArthur Drive  
Tracy, CA 95376, USA  
Tel: 209 839 3000  
Fax: 209 839 3022

AFS Industrial Distribution  
14300 Clay Terrace Blvd.  
Suite 250  
Carmel, IN 46032, USA  
Tel: 800 826 2884  
Fax: 800 573 2645

Latin America Sales  
Avenida Parque Lira  
79-402 Tacubaya  
Mexico C P 11850  
Tel: +52 55 5515 1776  
Fax: +52 55 5277 7564

Brazil Sales  
Av. Nações Unidas, 12.901  
Torre Oeste, 3º andar  
São Paulo – SP – Brasil  
04578-000  
Tel: 0800 015 9888  
Fax: +55 11 5509 0200

## International Locations

India Operations  
Unit no. 28, Chowringhee Court  
55/1, Chowringhee Road  
Kolkata – 700071  
India  
Tel: +91 33 4069 9170/80  
Fax: +91 33 4069 9184

Japan/Korea Sales  
Alcoa Japan Ltd.  
#1013 NBF Hibiya Bldg.  
Uchisaiwai-cho, Chiyoda-ku  
Tokyo 100-1011  
Japan  
Tel: +81 3 3539 6577  
Fax: +81 3 3539 6585

Melbourne Operations  
1508 Centre Road  
Clayton, Victoria, 3168  
Australia  
Tel: +61 3 8545 3333  
Fax: +61 3 8545 3390

Suzhou Sales  
58 Yinsheng Road, Shengpu  
Suzhou Industrial Park  
Suzhou Jiangsu 215126  
China  
Tel: 0512 62823800-8888  
Fax: 0512 62863810

Telford Operations  
Unit C, Stafford Park 7  
Telford, Shropshire TF3, 3BQ  
United Kingdom  
Tel: +44 1952 2900 11  
Fax: +44 1952 2904 59

Alcoa Fastening Systems  
St Cosme Operations  
9 rue de Cressonnieres  
72110 Saint Cosme en Valais  
France  
Tel: +33 0 2.43.31.41.00  
Fax: +33 0 2.43.31.41.41

Alcoa Fastening Systems  
Kelkheim Operations  
Industriestr. 6  
65779 Kelkheim  
Germany  
Tel: +49 [0] 6195 8050  
Fax: +49 [0] 6195 2001

[AlcoaFasteners.com](http://AlcoaFasteners.com)

**Disclaimer:** The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFS's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.

**Alcoa  
Fastening  
Systems**

